


Round bar, rolled



- 19 -

Complies with DIN 1013 **DIN EN 10060**

pickled/peeled and re-milled


Length = approx. 4.0-6.0 m

Test certificate EN 10204/3.1 AD 2000 W2

| Dimensions | kg/mtr. | Mat. no. 1.4112 | Mat. no. 1.4104 | Mat. no. 1.4301 | Mat. no. 1.4305 | Mat. no. 1.4404 | Mat. no. 1.4435 | Mat. no. 1.4542 |
|------------|---------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| 30.0 | 5.549 | | | | | | X | X |
| 35.0 | 7.553 | | | | | | X | X |
| 40.0 | 9.865 | | | | | | X | X |
| 45.0 | 12.480 | | | | | | X | X |
| 50.0 | 15.410 | | | | | X | X | |
| 52.0 | 16.670 | | | | | | X | |
| 55.0 | 18.650 | | | | | X | X | |
| 60.0 | 22.200 | | | | X | X | X | X |
| 65.0 | 26.050 | | | | X | X | X | |
| 70.0 | 30.210 | | X | X | X | X | X | X |
| 75.0 | 34.680 | | X | X | X | X | X | |
| 80.0 | 39.460 | X | X | X | X | X | X | X |
| 85.0 | 44.550 | | | X | X | X | X | |
| 90.0 | 49.940 | | X | X | X | X | X | X |
| 95.0 | 55.640 | | | | | X | | X |
| 100.0 | 61.550 | | | X | X | X | X | |
| 105.0 | 67.970 | | | X | X | X | X | |
| 110.0 | 74.600 | | X | X | X | X | X | |
| 115.0 | 81.540 | | | | X | X | | X |
| 120.0 | 88.780 | | X | X | X | X | X | X |
| 125.0 | 96.330 | | | | | X | | |
| 130.0 | 104.200 | X | | X | X | X | X | X |
| 140.0 | 120.840 | | | X | X | X | X | X |
| 150.0 | 138.720 | X | | X | X | X | X | X |
| 160.0 | 157.830 | | | X | X | X | X | |
| 170.0 | 178.180 | | | X | X | X | X | |
| 180.0 | 199.760 | | | X | X | X | X | X |
| 190.0 | 222.570 | | | X | X | X | X | |
| 200.0 | 246.620 | | | X | X | X | X | X |
| 210.0 | 271.900 | | | X | X | X | X | |
| 220.0 | 298.400 | | | X | X | X | X | |
| 230.0 | 326.100 | | | X | X | X | X | |
| 240.0 | 355.100 | | | X | X | X | X | |
| 250.0 | 385.300 | | | X | X | X | X | |
| 260.0 | 416.800 | | | X | | X | X | |

Other grades and dimensions available from factory inventory!

Round bar, rolled



- 20 -


Complies with DIN 1013 **DIN EN 10060**

pickled/peeled and re-milled

Length = approx. 4.0-6.0 m

Test certificate EN 10204/3.1 AD 2000 W2

| Dimensions | kg/mtr. | Mat. no. 1.4112 | Mat. no. 1.4104 | Mat. no. 1.4301 | Mat. no. 1.4305 | Mat. no. 1.4404 | Mat. no. 1.4435 | Mat. no. 1.4542 |
|------------|----------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| 275.0 | 466.300 | | | | | | x | |
| 280.0 | 483.400 | | | x | | x | | |
| 285.0 | 500.530 | | | | | | x | |
| 300.0 | 554.900 | | | x | | x | x | |
| 356.0 | 781.000 | | | | | | x | |
| 405.0 | 1011.000 | | | | | | x | |

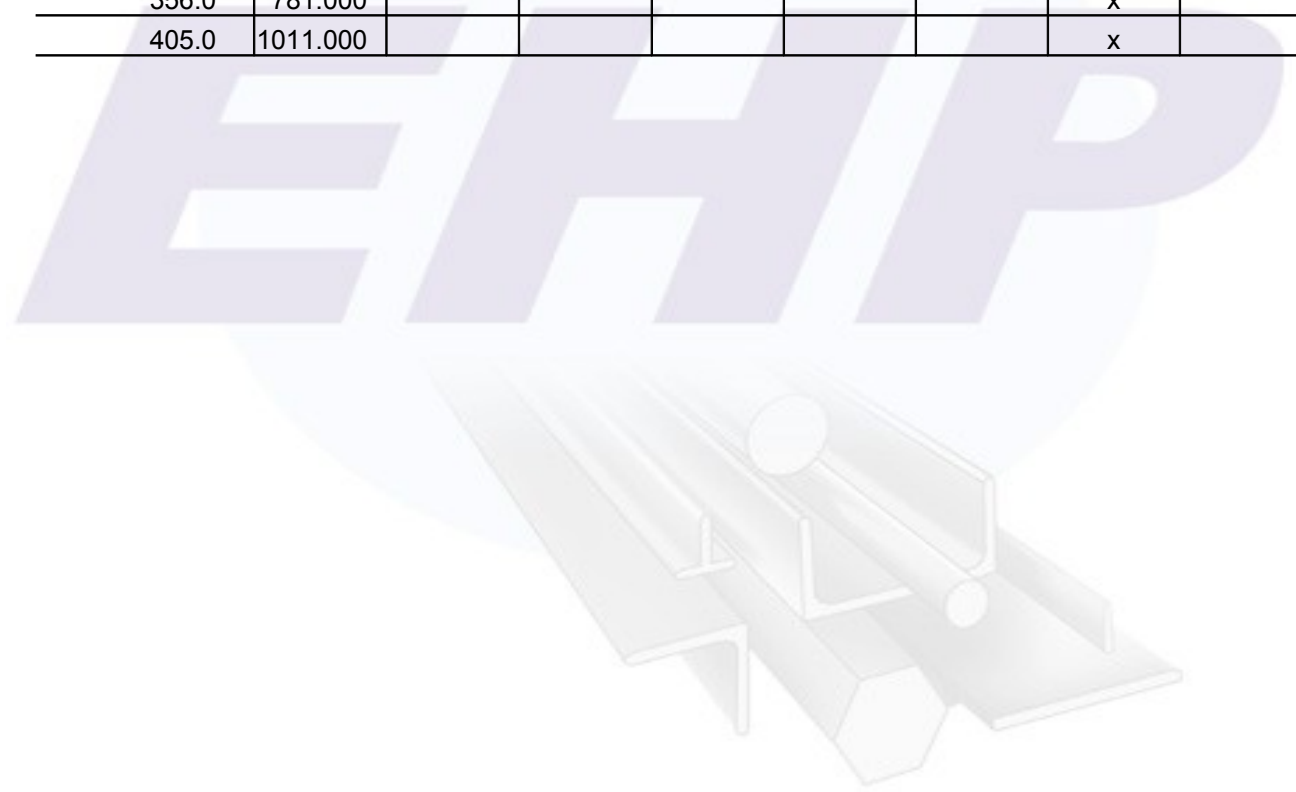

Other grades and dimensions available from factory inventory!

Notes

