



U-Profile



- 33 -

warm hergestellt, Toleranzen ähnlich DIN 1026
 Stablänge ca. 6 m
 Abnahmeprüfzeugnis EN 10204/3.1

Abmessung h x b x s x t		kg/mtr.	W.-Nr. 1.4301	W.-Nr. 1.4571
30 x	15 x 4 x 4,5	1,780	x	
40 x	20 x 3 x 3,5	1,800	x	
	35 x 5 x 7	4,800		
50 x	25 x 3 x 3,5	2,280		
	25 x 5 x 6	4,200		x
	38 x 5 x 7	5,700		
60 x	30 x 6 x 6	5,100	x	
65 x	42 x 5 x 7	7,400	x	
80 x	40 x 4 x 4	4,900		
	40 x 5 x 5	5,900	x	
	40 x 6 x 6	7,060	x	x
	40 x 6 x 8	8,800	x	x
100 x	50 x 4 x 4	6,100	x	
	50 x 5 x 5	7,650	x	
	50 x 6 x 6	8,900	x	x
120 x	55 x 7 x 9	13,500	x	
	60 x 6 x 6	10,900		x
150 x	75 x 9 x 9	20,000		x

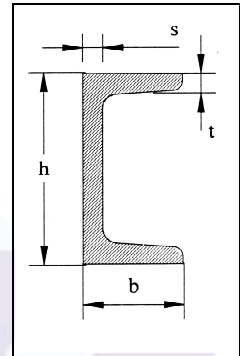

Weitere Qualitäten und Abmessungen aus Werksvorrat lieferbar!

Notizen

